


## GD-CI-BC4637T

4 MP Bullet IP-Camera 2.8~12mm Motor Varifocal ICR IR LED  
WDR H.265



- 4 Megapixel IP Camera with Full HD 1080P real time video
- Motorized Varifocal Lens:  $f = 2.8 - 12$  mm
- 0 Lux: Integrated LED IR Illuminator viewable distance up to 30m
- H.265, H.264 & MJPEG compression modes
- Support Dual Power PoE/DC12V
- 3 Axis Gimbal for wall and ceiling mount

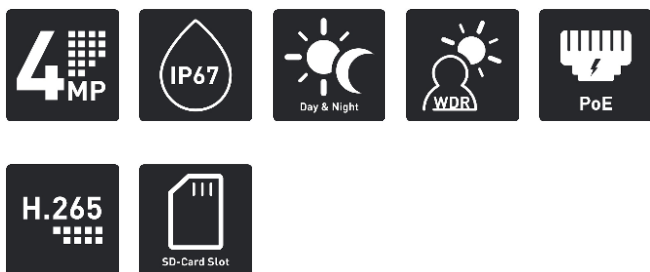

### ESSENTIAL

- Product Line Essential: high quality, basic features and remarkably many functions for smaller applications

Item Code: GD-CI-BC4637T

EAN CODE: 4260573062065

**Specifications GD-CI-BC4637T****Camera**

Image Sensor:	1/3" progressive Scan CMOS
Video Resolution:	2560 x 1440
Sensitivity Colour:	0.01 Lux @ F1.2 (AGC ON)
Sensitivity B/W:	0 Lux LED IR on
Shutter Speed:	1/3 ~ 1/100,000 sec
Slow Shutter:	Support

**Lens**

Lens Focal Length:	2.8 ~ 12 mm motorized vario focal lens
Horizontal Viewing Angle:	98° (Wide) ~ 28° (Tele)
Iris F-Number:	F1.6
Lens Mount:	Ø14

**Illuminator**

Max. IR Distance:	Up to 30 m
Wavelength:	850nm

**Video**

Col/B&W:	On, Off, Auto, IR-cut filter removable (ICR)
Wide Dynamic Range:	120 dB
Image Enhancement:	BLC, 3D DNR
Day/Night Switch:	Support auto, scheduled
Image settings:	Saturation, brightness, contrast and sharpness adjustable through client software or web browser

**Network**

Region of Interest:	Support 1 fixed region
Video Compression:	Main Stream: H.265+, H.265, H.264+, H.264 Sub-Stream: H.265, H.264, MJPEG
H.264 code profile:	Baseline Profile / Main Profile / High Profile
Bit Rate:	32Kbps ~ 8Mbps
Network Protocol:	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour
Frame Rate:	Main Stream 50Hz: 20 fps @ (2560× 1440) , 25fps @ (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 20 fps @ (2560 × 1440) , 30fps @ (2304 × 1296, 1920 × 1080, 1280 × 720) Sub- Stream 50Hz: 25fps @ (640 x 480, 640 × 360, 320 × 240) 60Hz: 30fps @ (640 x 480, 640 × 360, 320 × 240)
SD memory:	Micro SD/SDHC/SDXC card with ANR (up to 128G), NAS (Support NFS, SMB/CIFS)
Functions:	One-key reset, anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark, Ip-address filter

**I/O Interface**

Network Interface:	1x 10, 100 Base T, TX PoE (RJ-45)
--------------------	-----------------------------------

Item Code: GD-CI-BC4637T

EAN CODE: 4260573062065

**I/O Interface**

Video Outputs: 1x CVBS (1Vpp) , BNC

**Intelligent Functions**

Event Source: Video tampering, network disconnected, IP address conflicted, HDD full, HDD error

Intrusion Detection: Motion Detection

**Approvals**

Regulation: CE, EAC, FCC, RoHS Compliant

Protection Rating: IP67

Standard: ONVIF (Profile S, Profile G), ISAPI

**Environmental**

Operating Temperature: -40 °C ~ 60 °C (-40 °F ~ 140 °F)

Humidity: less than 95%, non condensing

**Electrical**

Supply Voltage: 12 VDC, PoE (IEEE 802.3af)

Power Consumption: Max. 12,9 W

**Mechanical**

Mount: Pan: 0° to 360°, tilt: 0° to 90°, rotation: 0° to 360°, 3-Axis Adjustment

Dimensions: Ø 105 × 244,4 mm (Ø 4.1 × 9,6 inch)

Weight: 750 g (1.65 lb)

**Accessories:**

GD-BR-AJX04



GD-BR-AMC03



GD-BR-AML01

Item Code: GD-CI-BC4637T

EAN CODE: 4260573062065